




القوة الذكية للتجارة ش. ذ. م. ح.
ALQWA ALTHAKYA TRADING L.L.C

AQT GENERATORS

www.aqtgenerators.com

AQT-275

GENERATING SET (TECHNICAL DATA SHEET)

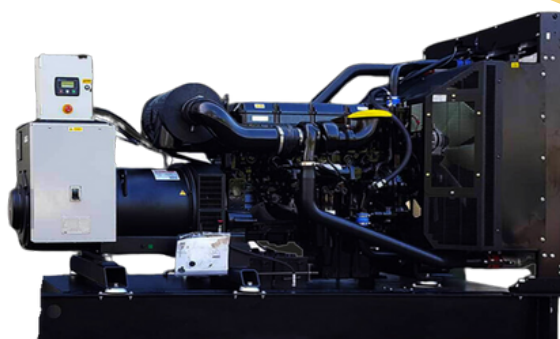

"We deliver power, service and solutions in exactly the way you want."

Standard Specifications:

1- Prime Rating:

Unlimited hours usage, with an average load factor of 80% over each 24 hour period. 10% overload is available for 1 hour in every 12 hours operation. 0 overload is permitted on standby power.

2- Standby Rating:

Limited to 500 hours annual usage, with an average load factor of 80% of the published standby power rating over each 24 hour period. Up to 300 hours of annual usage may be run continuously. No overload is permitted on standby power.

3- Engine:

Perkins, including air filters, fuel filters, oil filter, starting motor and charging alternator etc.

4- Alternator Type:

brushless AC alternator

5- Radiator:

50°C, fan protective shroud

Output Rating:

| PRIME: | | STANDBY: | |
|---------------------------|--------|----------|--------|
| 50 Hz—1500 Rpm 400 V, 3ph | | | |
| 250 kVA | 200 kW | 275 kVA | 220 kW |
| 60 Hz—1800 Rpm 480 V, 3ph | | | |
| 281 kVA | 225 kW | 313 kVA | 250 kW |

ENGINE SPECIFICATIONS

| | |
|-----------------------------|---------------------------|
| Engine Make | PERKINS |
| Engine Model | 1506A-E88TAG3 |
| No. of Cylinders | 6 vertical in-line |
| Cycle | 4 Stroke |
| Aspiration | Turbocharged after cooled |
| Cooling Method | Water cooled |
| Governing Type | Electronic |
| Governing Class | G2 - ISO 8528 Part 1 |
| Compression Ratio | 16.1:1 |
| Displacement | 8.8 L |
| Bore/Stroke | 112 x 149 mm |
| Dynamic Charging Alternator | 45AMP, 24V |

ALTERNATOR SPECIFICATIONS

| | |
|------------------------------|------------------------------|
| Alternator Make | AQT Leroy Somer Stamford |
| Alternator Model | AQT TAL-046-D UCD274K |
| Number of Poles | 4 |
| Number of Winding Leads | 6 |
| Type of Bearing | Single Bearing |
| Insulation Class - Temp Rise | Cont. H - 125/40 °C |
| Ingress Protection Rating | IP 23 |
| Excitation System | Self Excited |
| AVR Model | R150 |

Comply with Standards

ISO 3046, BS 5514, DIN 6271, NEMA-MGI, DIN EN, BS 5000, IEC 60034, IEC 60947-2

Powered By:

Perkins®

Diesel Generator

STAMFORD
power generation

LEROY-SOMER

meccalte

DSE

Alternator Operating Data

| | |
|--------------------------|--------------|
| Over speed | 2250 rpm |
| Voltage Regulation | + 1% |
| Harmonic Coefficient THF | < 2.5% |
| Tel. influence TIF | < 50 |
| Cooling air flow | 0.48 m3/ Sec |

Standard Specifications:

6- Fuel Tank:

Capacity of fuel tank is for 8-10 hours running
Built in fuel tank up to 800 kVA

7- Circuit Breaker:

3 pole LS MCCB

8- Control system alarms:

- Over and Under Speed
- Low and High Battery Volt.
- Start and Stop Failure
- Over Current
- Under / Over Generator Voltage
- Low Oil Pressure
- Emergency stop
- High engine temperature

9- Warranty policy:

- **AQT GENERATOR** products has a warranty for 12 Months or 1000 hours whichever occurs first against any manufacturing defects
- Wearing parts (filters), incorrect man made operation, maintenance failures are excluded from the warranty policy

Acoustic Enclosure Specifications:

| Enclosure Type | Acoustic & Weather Proof |
|---------------------------|---|
| Drainage Provision | Fuel and Water Drainage |
| Transportation | Tested Single Point Lifting Facility & Forklift Pockets |
| Ingress Protection Rating | IP 23 |
| Lifting | ISO Standard Lifting |
| Canopy RAL Color | TAL 9010 |
| Base frame RAL Color | RAL 9011 |
| Noise Pressure level @ 7m | 70db(A) @ 7mt |

Control System:

Large back-lit text display

Multiple display languages

DSENET expansion compatible

Data logging facility

Fully configurable via PC using USB communication

Front panel configuration

Efficient power save mode

3 phase generator sensing

Accumulated power monitoring (kWh, kVAh, kVArh)

Generator/load current monitoring and protection (kW)

Breaker control via fascia buttons

Fuel and start outputs, configurable using can

4 configurable DC outputs

4 configurable analogue/digital inputs

Automatically transfers between mains (utility) and generator

Increased input and output expansion capability via dsenet

IP65 rating (with optional gasket) offers increased resistance to water ingress

Digital inputs; Analogue Inputs




DSE6110 MKII

AUTO START & AUTO MAINS
FAILURE CONTROL

Dimensions:

| Type | Length (mm) | Width (mm) | Height (mm) | Fuel Tank (L) | Weight (KG) |
|--------|-------------|------------|-------------|---------------|-------------|
| OPEN | 2850 | 1000 | 1800 | 510 | 2200 |
| CLOSED | 4100 | 1300 | 1960 | 510 | 3275 |

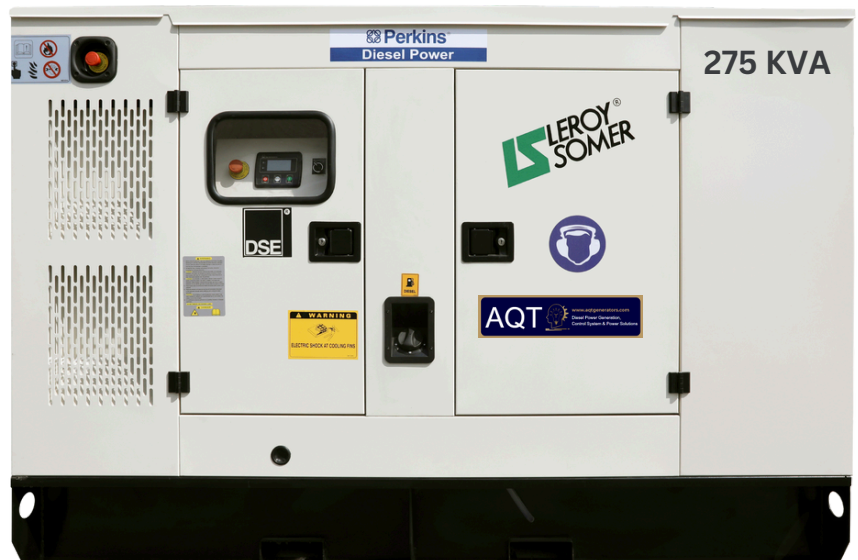

+971 4 547 1703



info@aqtgenerators.com



http://www.aqtgenerators.com



Engine:



Perkins heavy duty high performance industrial type diesel engine.

COOLING SYSTEM

| | |
|------------------------------|-------------|
| Total Coolant Capacity (L) | 37.2 L |
| Cooling Fan Air Flow | 370 m3/ min |
| Radiator Fan Load | 5 kW |
| Heat Radiation to Room (PRP) | 31 kW |
| Heat Radiation to Room (ESP) | 35 kW |

LUBRICATION SYSTEM

| | |
|--------------------|---------------------|
| Oil Filter Type | Spin-On Full Flow |
| Total Oil Capacity | 41 L |
| Oil Type | API-CH-4 or ACEA E5 |

EXHAUST SYSTEM

| | |
|----------------------------|--------------------|
| Muffler Type | Industrial Grade |
| Max. Back Pressure | 10 kPa |
| Exhaust Gas Flow (PRP/ESP) | 37.5 /40.4 m3/ min |
| Exhaust Gas Temperature | < 558 0C |

FUEL SYSTEM

| | |
|---------------------------|-----------------|
| Recommended Fuel | Class A2 Diesel |
| Fuel Consumption Standby | 61 L/hr |
| Fuel Consumption 100% PRP | 56 L/hr |
| Fuel Consumption 75% PRP | 42 L/hr |
| Fuel Consumption 50% PRP | 29 L/hr |

AIR SYSTEM

| | |
|-----------------------------------|-------------|
| Air Filter Type | Dry Element |
| Combustion Air Flow (PRP) | 14.4 m3/min |
| Combustion Air Flow (ESP) | 15 m3/min |
| Max Air Filter Intake Restriction | 6.2 kPa |

Optional configurations:

Engine accessories:

- ☐ Heavy-duty air filter
- ☐ Coolant heater
- ☐ Lubricant oil heater
- ☐ Fuel and Water Separator
- ☐ Lube oil rotary pump

Alternator And Accessories:

- ☐ Leroy somer /stamford
- ☐ Anti condensation heater
- ☐ PMG + AVR ◇ Double bearing
- ☐ alternator High voltage _____kV
- ☐ RTDs for Bearing and winding

Cooling System:

- ☐ 55 degree Radiator
- ☐ Remote Radiator

Control System:

- ☐ AMF
- ☐ Parallel
- ☐ Practical type in low temperature environment
- ☐ Control Screen Heater
- ☐ Remote Annunciators
- ☐ Other (Comp, DEIF)

Circuit Breaker:

- ☐ 3/4 poles
- ☐ Fixed/handcart type
- ☐ Electric mechanism

Automatic Transfer Switch (ATS):

- ☐ ATS cabinet
- ☐ Contractor type ATS
- ☐ Motorized changeover type ATS

Start Battery:

- ☐ Nickel-cadmium battery
- ☐ Maintenance-free battery
- ☐ Battery charger and selector switch
- ☐ Charging current meter

External Fuel Tank:

- ☐ Single /double wall fuel tank (500-5000 L)
- ☐ Fuel Transfer pump

Exhaust Muffler:

- ☐ Residential grade
- ☐ Critical grade
- ☐ Hospital grade

Available for voltages :

- ☐ 400/230V, 480/277V, 380/220V, 440/254V, 416/240V, 220/127V, 208/120V



+971 4 547 1703



info@aqtgenerators.com



http://www.aqtgenerators.com



Our Success

We owe our success to our hardworking, highly skilled and committed employees. Our core focus lies in providing customized integrated products and services with well-established infrastructure, equipment and manpower to support and provide the turn key solutions for various industries. We provide the latest in power generator technology equipment, allowing us to give our customers the best product and the best possible service.

Objectives

Our objective is to serve customers to the utmost by providing them with the best-in-class electric generators, reliable door to door delivery, and after sales service at competitive market prices.

"We continue to build our solid reputation for excellence and response, while delivering reliable and tailored solutions to meet the customer's requirements".



AQT GENERATORS

At AQT Generators, we take pride in being a dynamic force in the realm of diesel generator sets, offering an extensive range of international brands renowned for their reliability and performance. Our commitment to excellence is reflected in our partnerships with world-famous engine manufacturers such as Perkins and Cummins, coupled with top-notch alternators from Stamford and Leroy Somer.



القوة الذكية للتجارة ش. ذ. م. م.
ALQWA ALTHAKYA TRADING L.L.C.

AQT GENERATORS

CONTACT US

Office 204, Al Owais Building,
Port Saeed, Plot No. 388-0,
Dubai, UAE

Call Us: +971 4 547 1703

Email: info@aqtgenerators.com

FOLLOW US ON OUR SOCIAL MEDIA ACCOUNTS



WhatsApp



LinkedIn



Facebook



Instagram



TikTok



Youtube